

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.


Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

## **IMAGES ARE BEST AVAILABLE COPY.**

As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.

**THIS PAGE BLANK (USPTO)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 872 790 A2

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:  
21.10.1998 Bulletin 1998/43

(51) Int. Cl.<sup>6</sup>: G06F 1/28

(21) Application number: 98106581.6

(22) Date of filing: 09.04.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 16.04.1997 JP 99083/97

(71) Applicant: NEC CORPORATION  
Tokyo (JP)

(72) Inventors:  
• Shingo, Murayama,  
NEC IC Microcomp. Syst., Ltd.  
Kawasaki-shi, Kanagawa (JP)  
• Akira, Futamata,  
NEC IC Microcomp. Syst., Ltd.  
Kawasaki-shi, Kanagawa (JP)

(74) Representative:  
Glawe, Delfs, Moll & Partner  
Patentanwälte  
Postfach 26 01 62  
80058 München (DE)

(54) Power supply voltage detection device

(57) A power supply voltage detection device includes a reference voltage generating circuit, an integrator circuit, a lower limit comparator, and an upper limit comparator. The reference voltage generating circuit generates lower and upper limit reference voltages by resistance-dividing a power supply voltage. The integrator circuit integrates comparative voltages extracted by resistance-dividing the power supply voltage. The lower limit comparator compares the lower limit reference voltage from the reference voltage generating circuit with an output voltage from the integrator circuit to detect that the power supply voltage becomes equal to or lower than a lower limit. The upper limit comparator compares the upper reference voltage from the reference voltage generating circuit with an output voltage from the integrator circuit to detect that the power supply voltage becomes equal to or higher than an upper limit.

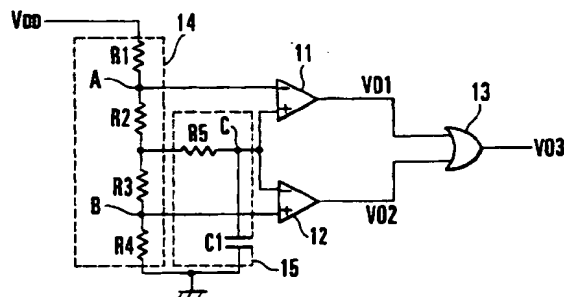


FIG. 1

EP 0 872 790 A2

## Description

### Background of the Invention

The present invention relates to a power supply voltage detection device for detecting abrupt variations in power supply voltage due to external noise and the like in an apparatus such as a microcomputer.

A conventional apparatus such as a microcomputer malfunctions owing to abrupt variations in power supply voltage. For this reason, a power supply voltage detection circuit detects that the power supply voltage falls outside a rated range, and the apparatus is reset upon detection of a power supply voltage variation.

Fig. 6 shows a conventional power supply voltage detection circuit. Referring to Fig. 6, the power supply voltage detection circuit is constituted by a lower limit comparator 11 for detecting that a power supply voltage VDD becomes equal to or lower than a rated lower limit Vref1, an upper limit comparator 12 for detecting that the power supply voltage VDD becomes equal to or higher than a rated upper limit Vref2, an AND gate 13 for ANDing an output VO11 from the lower limit comparator 11 and an output VO12 from the upper limit comparator 12, and resistors R11 and R12.

A reference voltage Vref1' input to the lower limit comparator 11 and a reference voltage Vref2' input to the upper limit comparator 12 are set with respect to the rated lower limit Vref1 and the rated upper limit Vref2 of the power supply voltage VDD as follows:

$$Vref1' = Vref1 \times R12 / (R11 + R12)$$

$$Vref2' = Vref2 \times R12 / (R11 + R12)$$

The operation of the power supply voltage detection circuit having the above arrangement will be described with reference to Figs. 7A to 7D. Referring to Fig. 7A, when the power supply voltage VDD abruptly drops to become equal to or lower than the rated lower limit Vref1 owing to external noise or the like, the output VO11 from the lower limit comparator 11 is set at "L" level (Low level), as shown in Fig. 7B. As a result, an output VO13 from the AND gate 13 is also set at "L" level.

When the power supply voltage VDD abruptly rises to become equal to or higher than the rated upper limit Vref2, the output VO12 from the upper limit comparator 12 is set at "L" level, as shown in Fig. 7C. As a result, the output VO13 from the AND gate 13 is also set at "L" level, as shown in Fig. 7D. That the power supply voltage VDD becomes equal to or lower than the rated lower limit Vref1 or equal to or higher than the rated upper limit Vref2 can be detected in this manner.

Some apparatus such as a microcomputer operates in a wide operating voltage range and can be used with a plurality of power supply voltage ratings (e.g., operable at power supply voltages VDD of 5 V, 3 V,...).

Obviously, in this case, when the power supply voltage VDD is changed, the rated lower limit Vref1 and the rated upper limit Vref2 also vary accordingly.

In the conventional power supply voltage detection circuit, however, the reference voltage Vref1' for detecting that the power supply voltage VDD becomes equal to or lower than the rated lower limit Vref1 must be applied, together with the reference voltage Vref2' for detecting that the power supply voltage VDD becomes equal to or higher than the rated upper limit Vref2. For this reason, when the rating of the power supply voltage VDD changes, the reference voltages Vref1' and Vref2' must be set again in accordance with the rated lower limit Vref1 and the rated upper limit Vref2.

Although this circuit is designed to detect abrupt variations in power supply voltage due to external noise and the like, the circuit also detects moderate variations in power supply voltage (the output VO13 from the AND gate 13 is set at "L" level) during a power-on period (a period PON in Figs. 7A to 7D) or power-off period.

### Summary of the Invention

It is an object of the present invention to provide a power supply voltage detection device in which the reference voltages need not be re-generated in accordance with the power supply voltage.

It is another object of the present invention to provide a power supply voltage detection device which can detect only abrupt variations in power supply voltage due to external noise and the like.

In order to achieve the above objects, according to the present invention, there is provided a power supply voltage detection device comprising reference voltage generating means for generating lower and upper limit reference voltages by resistance-dividing a power supply voltage, integrator means for integrating comparative voltages extracted by resistance-dividing the power supply voltage, lower limit comparison means for comparing the lower limit reference voltage from the reference voltage generating means with an output voltage from the integrator means to detect that the power supply voltage becomes not higher than a lower limit, and upper limit comparison means for comparing the upper reference voltage from the reference voltage generating means with an output voltage from the integrator means to detect that the power supply voltage becomes not lower than an upper limit.

### Brief Description of the Drawings

Fig. 1 is a block diagram showing a power supply voltage detection circuit according to an embodiment of the present invention;

Figs. 2A to 2C are timing charts showing the operation of the power supply voltage detection circuit in Fig. 1 when the power supply voltage drops;

Figs. 3A to 3C are timing charts showing the opera-

tion of the power supply voltage detection circuit in Fig. 1 when the power supply voltage rises;

Figs. 4A to 4D are timing charts showing the operation of the power supply voltage detection circuit in Fig. 1 when external noise is superimposed on the power supply voltage;

Fig. 5 is a graph of the voltage characteristics of the power supply voltage detection circuit in Fig. 1, showing its operation during a power-on period;

Fig. 6 is a block diagram showing a conventional power supply voltage detection circuit; and

Figs. 7A to 7D are timing charts showing the operation of the conventional power supply voltage detection circuit.

### Description of the Preferred Embodiment

The present invention will be described in detail below with reference to the accompanying drawings.

Fig. 1 shows a power supply voltage detection circuit according to an embodiment of the present invention. Referring to Fig. 1, the power supply voltage detection circuit is constituted by a lower limit comparator 11 for detecting that a power supply voltage VDD becomes equal to or lower than a rated lower limit Vref1, an upper limit comparator 12 for detecting that the power supply voltage VDD becomes equal to or higher than a rated upper limit Vref2, an OR gate 13 for ORing an output VO1 from the lower limit comparator 11 and an output VO2 from the upper limit comparator 12, a reference voltage generating circuit 14 for generating a lower limit reference voltage, an upper limit reference voltage, and a divided voltage by resistance-dividing the power supply voltage VDD, and an integrator circuit 15 for integrating the divided voltage output from the reference voltage generating circuit 14 and outputting the resultant voltage to the lower limit comparator 11 and the upper limit comparator 12.

The lower and upper limit reference values output from the reference voltage generating circuit 14 are respectively output to the lower limit comparator 11 and the upper limit comparator 12. Each of the lower limit comparator 11 and the upper limit comparator 12 is constituted by an operational amplifier having an inverting input terminal and a non-inverting input terminal.

The reference voltage generating circuit 14 is constituted by resistors R1 to R4 for resistance-dividing the power supply voltage VDD. A node A of the resistors R1 and R2 is connected, as a point at which a reference voltage VA is generated, to the inverting input terminal of the lower limit comparator 11. A node B of the resistors R3 and R4 is connected, as a point at which a reference voltage VB is generated, to the non-inverting input terminal of the upper limit comparator 12. The integrator circuit 15 is constituted by a resistor R5 and a capacitor C1. The integrator circuit 15 integrates the voltages at the node of the resistors R2 and R3, and supplies the integral output generated at a point C to the

non-inverting input terminal of the lower limit comparator 11 and the inverting input terminal of the upper limit comparator 12.

When the value of the resistor R3 is set to be larger than that of the resistor R5, the relationship between the power supply voltage VDD, the reference voltages VA and VB, and a voltage VC at the point C is expressed as

$$VDD > VA > VC > VB$$

The operation to be performed when the power supply voltage VDD abruptly drops will be described next with reference to Figs. 2A to 2C. When the power supply voltage VDD which has been set in the range of the rated lower limit Vref1 to the rated upper limit Vref2 abruptly drops, the reference voltages VA and VC at the points A and B and the voltage VC at the point C also drop accordingly. At this time, the voltage VC at the point C drops more moderately than the reference voltage VA at the point A because the capacitor C1 is discharged. At time t1, the relationship in magnitude between the reference voltage VA at the point A and the voltage VC at the point C is reversed, and the voltage VC becomes higher than the reference voltage VA.

With this operation, the output VO1 from the lower limit comparator 11 is set at "H" level, as shown in Fig. 2B, and an output VO3 from the OR gate 13 is also set at "H" level, as shown in Fig. 2C. As a result, that the power supply voltage VDD becomes equal to or lower than the rated lower limit Vref1 can be detected from the output VO3 from the OR gate 13 which has changed to "H" level.

The operation to be performed when the power supply voltage VDD abruptly rises will be described next with reference to Figs. 3A to 3C. As shown in Fig. 3A, when the power supply voltage VDD which has been set in the range of the rated lower limit Vref1 to the rated upper limit Vref2 abruptly rises, the reference voltages VA and VB at the points A and B and the voltage VC at the point C also rise accordingly. At this time, the voltage VC rises more moderately than the reference voltage VB at the point B because the capacitor C1 is charged. At time t2, the relationship in magnitude between the reference voltage VB at the point B and the voltage VC at the point C is reversed, and the voltage VC becomes lower than the reference voltage VB.

With this operation, the output VO2 from the upper limit comparator 12 is set at "H" level, as shown in Fig. 3B, and the output VO3 from the OR gate 13 is also set at "H" level, as shown in Fig. 3C. As a result, that the power supply voltage VDD becomes equal to or higher than the rated upper limit Vref2 can be detected from the output VO3 from the OR gate 13 which has changed to "H" level.

The operation to be performed when external noise is applied to the power supply voltage VDD is the same as that shown in Figs. 2A to 2C and 3A to 3C. More specifically, the operation to be performed when external

voltage, the reference voltages need not be set again in accordance with changes in power supply voltage ratings.

## Claims

- 1. A power supply voltage detection device characterized by comprising:**

10

15

20

25

35

55

reference voltage generating means (14) for generating lower and upper limit reference voltages by resistance-dividing a power supply voltage;

integrator means (15) for integrating comparative voltages extracted by resistance-dividing the power supply voltage;

lower limit comparison means (11) for comparing the lower limit reference voltage from said reference voltage generating means with an output voltage from said integrator means to detect that the power supply voltage becomes not higher than a lower limit; and upper limit comparison means (12) for comparing the upper reference voltage from said reference voltage generating means with an output voltage from said integrator means to detect that the power supply voltage becomes not lower than an upper limit.

30

the lower limit reference voltage is generated from a node of said first and second resistors, and the upper reference voltage is generated from a node of said third and fourth resistors.

40

45

a fifth resistor (R5) having one terminal connected to the node of said second and third resistors and the other terminal connected to each of input terminals of said lower and upper limit comparison means; and

a capacitor having one terminal connected to the other terminal of said fifth resistor and the other terminal grounded.

5. A device according to claim 4, wherein said fifth resistor has a resistance lower than that of said

third resistor.

6. A device according to claim 4, wherein said lower limit comparison means comprises an operational amplifier having a non-inverting input terminal connected to the node of said first and second resistors and an inverting input terminal connected to the other terminal of said fifth resistor, and
- said upper limit comparison means comprises an operational amplifier having an inverting input terminal connected to the other terminal of said fifth resistor and a non-inverting input terminal connected to the node of said third and fourth resistors.
7. A device according to claim 1, further comprising OR means (13) for ORing outputs from said lower and upper limit comparison means to output a detection signal indicating an abrupt variation in power supply voltage.

5

10

15

20

25

30

35

40

45

50

55

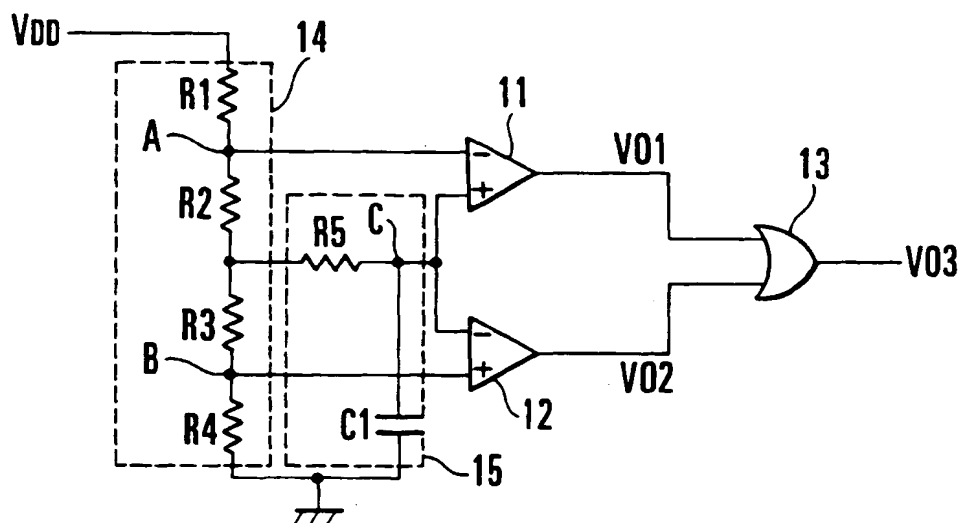


FIG. 1



FIG. 2A

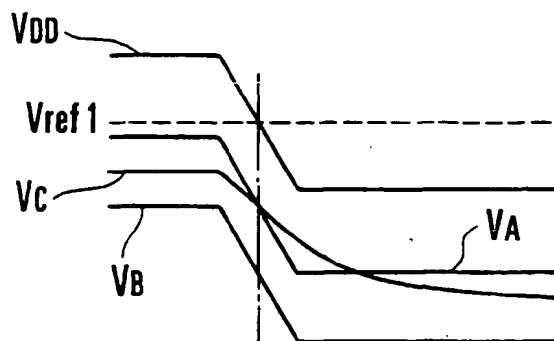


FIG. 2B



FIG. 2C

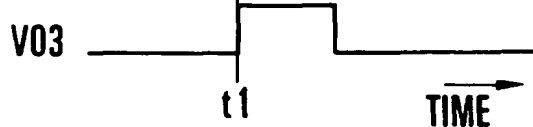


FIG. 3A

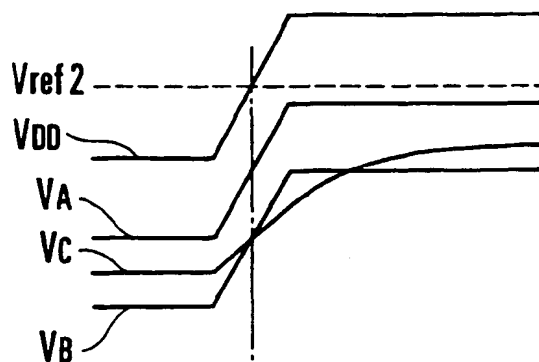
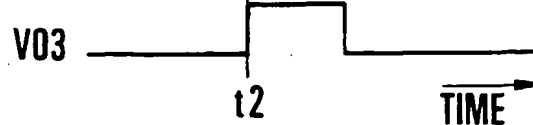


FIG. 3B



FIG. 3C



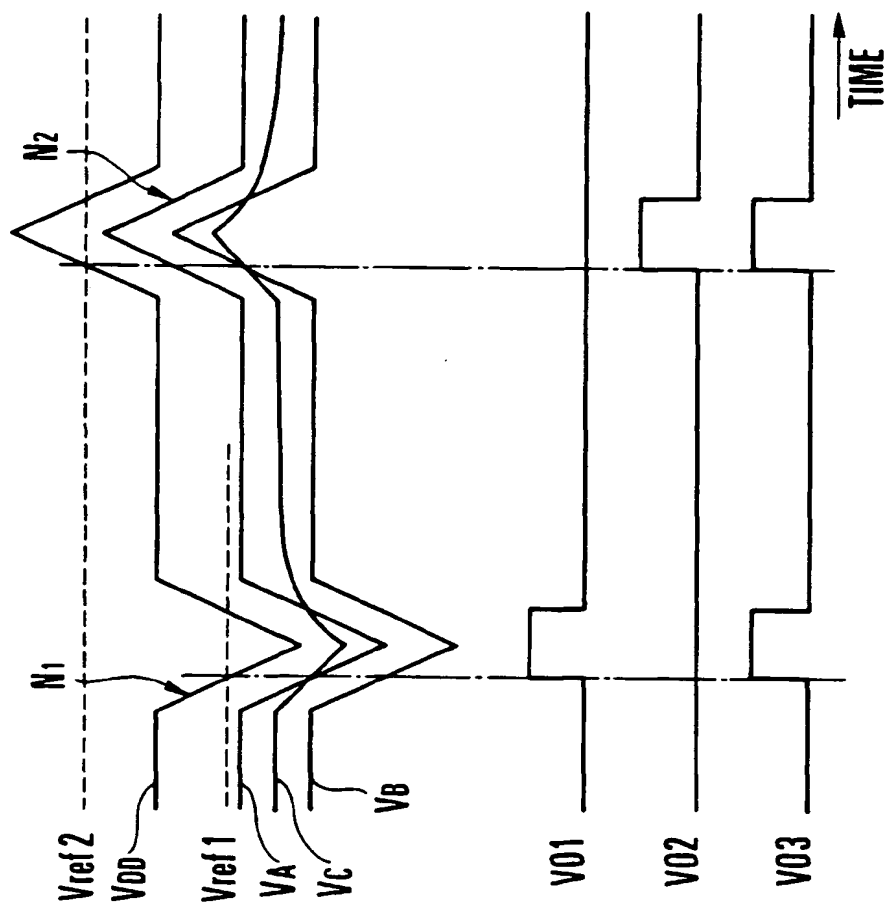


FIG. 4A

FIG. 4B

FIG. 4C

FIG. 4D

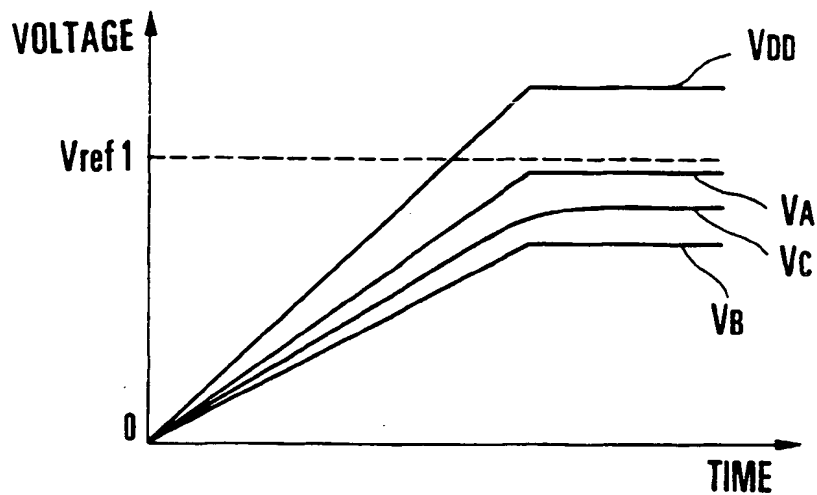


FIG. 5

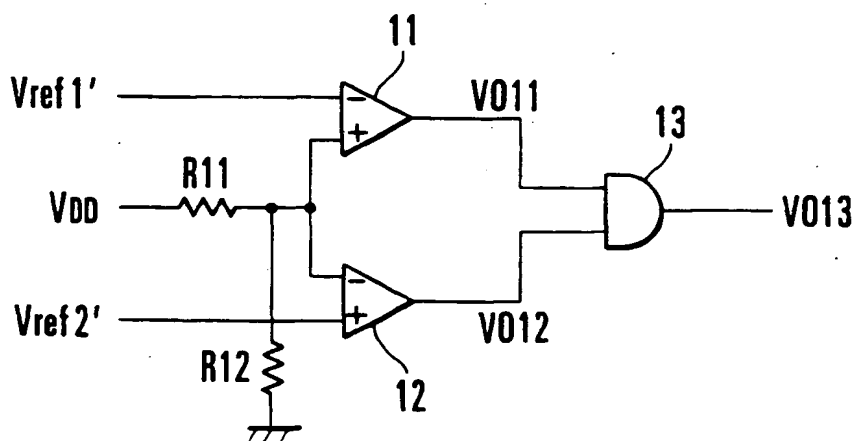


FIG. 6  
PRIOR ART

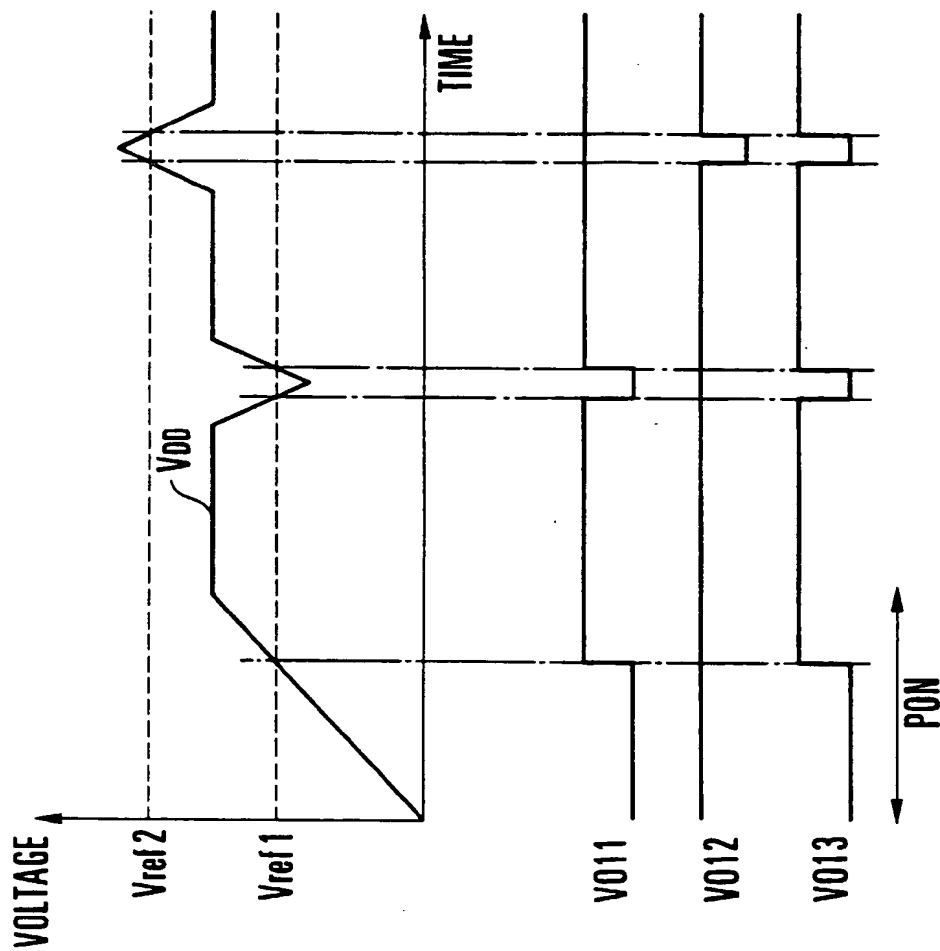


FIG. 7A  
PRIOR ART

FIG. 7B  
PRIOR ART

FIG. 7C  
PRIOR ART

FIG. 7D  
PRIOR ART